


Challenger 300

Instructions for replacing front wheel moulding

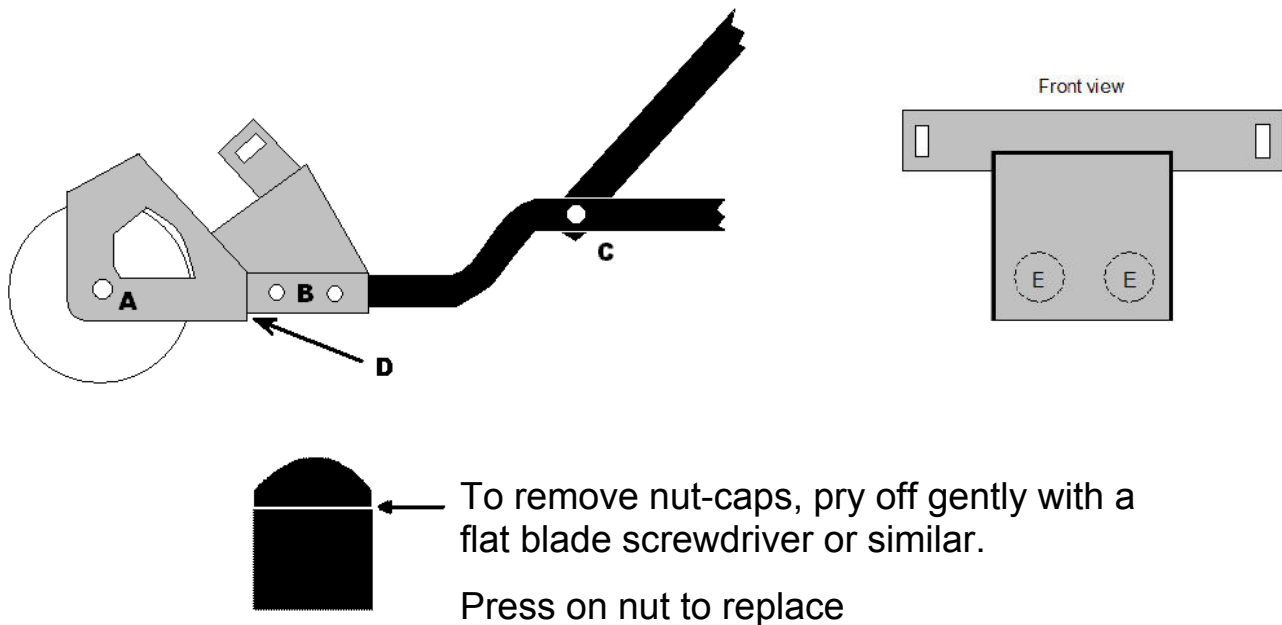

- 1 Remove the front wheel by unscrewing bolts 'A' and remove axle bolt using 12mm spanner.
- 2 Loosen bolt 'C' using 10mm spanner
- 3 Remove bolts 'B' on each side (4 bolts) using 10mm spanner.
- 4 Grasp wheel moulding firmly and pull from frame. It is designed to be a tight fit!
If necessary, lightly tap with hammer at point 'D' if moulding proves difficult to remove.

IMPORTANT do not hammer centre of moulding.

- 5 Slide new moulding on to frame spars. If necessary gently tap home with hammer where the socket tubes meet the main moulding 'E'.
- 6 Replace bolts 'B'.
- 7 Tighten bolt 'C'.
- 8 Replace front wheel.

In case of difficulty, please call us on 01933 670997