


# FITTING INSTRUCTIONS WARRIOR 400 CONTROLLER


**DISCONNECT THE BATTERY BEFORE PROCEEDING**

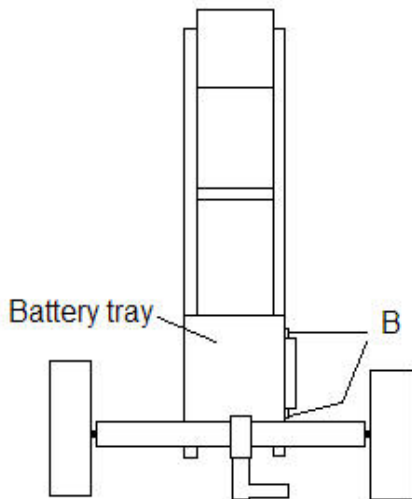

Warrior 400 - top view

The Controller is situated to the right of the battery tray.

To remove the existing controller, unfasten the retaining bolts (B) using a Phillips screwdriver and an 8mm spanner. Both tools are supplied with the trolley.

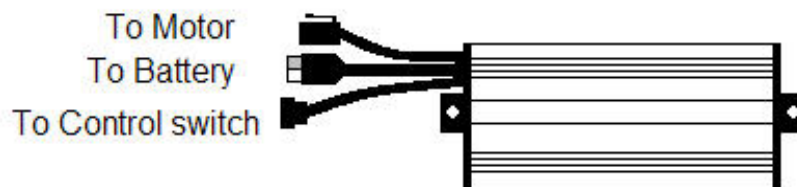

The controller has 3 cables emerging from it. Please disconnect these cables, one to the motor, one to the Control Switch and if still connected, one to the battery. It may be necessary to cut any cable ties in order to do this.

Reconnect the cables to the new controller before reattaching it to the trolley to test.

Connect the battery and ensure all is working correctly.

Disconnect the battery.

Reattach the Controller at the side of the battery tray using screws 'B,'

Replace any cable ties you may have removed during this procedure.

**If you encounter any problems, or have difficulty in following these instructions, please call us on 01933 670997 where we will be happy to help.**